


Forquilha 0,5 - 16 mm²

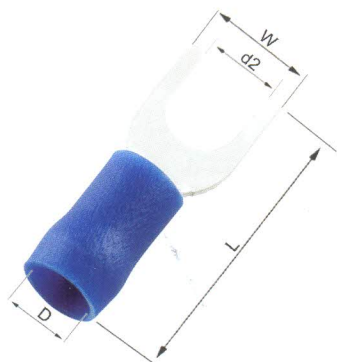

PRÉ-ISOLADO - SV
 NÃO-ISOLADO - SN
 REFORÇADO - SD

Corrente Máxima:

18 Amp (Red)
 50 Amp (Yellow)
 30 Amp (Blue)

Voltagem Máxima:

105°C 600 Volts

Isolação:

PVC

Cobre Eletrolítico:

99,95%

SNYB8-5 70 Amp | 105°C 600 Volts | NYLON

SNYB14-6 95 Amp | 105°C 600 Volts | NYLON

Bitola mm ²	Código	Furo D2	W	Dimensões			Alicate para Crimpagem
				L	D	T	
0,5 - 1,5 mm ²	SV1-3.2	#4	3,20	5,70	21,0	4,0	0,75
	SVS1-3.7	#6	3,70	5,70	21,0	4,0	0,75
	SVL1-3.7	#6	3,70	6,40	21,0	4,0	0,75
	SVS1-4	#8	4,30	6,40	21,0	4,0	0,75
	SVL1-4	#8	4,30	8,10	21,0	4,0	0,75
0,5 - 1,5 mm ²	SVS1-5	#10	5,30	8,10	21,0	4,0	0,75
	SVL2-3.7	#6	3,70	6,0	21,0	4,5	0,8
1,5 - 2,5 mm ²	SVS2-4	#8	4,30	6,40	21,0	4,5	0,8
	SVL2-4	#8	4,30	7,90	21,0	4,5	0,8
1,5 - 2,5 mm ²	SVS2-5	#10	5,30	7,90	21,0	4,5	0,8
	SVS2-6	1/4	6,40	9,30	21,0	4,5	0,8
4 - 6 mm ²	SV5-3.7	#6	3,70	8,30	25,50	6,3	1,0
	SVS5-4	#8	4,30	8,30	25,50	6,3	1,0
	SV5-5	#10	5,30	9,0	25,50	6,3	1,0
	SVS5-6	1/4	6,40	9,0	25,50	6,3	1,0
10 mm ²	SNYB8-5	#10	5,30	10,5	28,3	8,0	1,2
16 mm ²	SNYB14-6	1/4	6,40	11,0	36,5	11,0	1,5

Pré-isolado:

OT-SN-03C
 KS-JD-90512

Sem-isolação:

OT-SN-06
 OT-BN-16
 KS-JD-90512

